


GF22 - GF22W 2x 2" Passive Full-Range Loudspeaker



The GF22 is a passive full-range loudspeaker designed to be surface mounted or installed with the dedicated wall bracket.

The GF22 is a point source loudspeaker comprising two 2" transducers housed in a column cabinet with bass reflex port. Being esthetically similar to the GF82 line array loudspeaker make it easy the installation in mixed configuration.

The resilient ABS cabinets suite both outdoor and indoor applications in permanent installations for music and speech in conference rooms, hotels, bars, restaurants and retail shops.

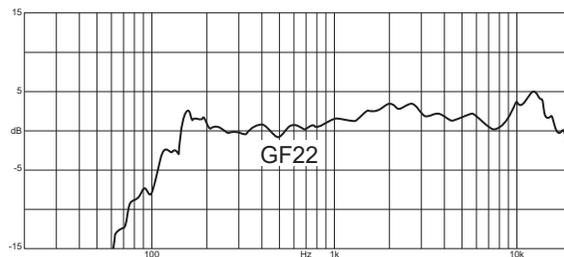


| Suggested amplifiers | |
|--|--|
| | 2-ch, 125W@4Ω per ch without DSP KGEAR GA201 |
| 4-ch, 150W@4Ω per ch with DSP KGEAR GA41 | 4-ch, 150W@4Ω per ch without DSP KGEAR GA41L |
| 4-ch, 750W@4Ω per ch with DSP KGEAR GA43 | 4-ch, 750W@4Ω per ch without DSP KGEAR GA43L |
| 4-ch, 1500W@4Ω per ch with DSP KGEAR GA46 | 4-ch, 1500W@4Ω per ch without DSP KGEAR GA46L |

| Technical specifications | |
|--------------------------|-----------------------------------|
| Type | Passive point source loudspeaker |
| Transducers | 2x 2" Ferrite magnet woofers |
| Frequency Response | 90 Hz - 20 kHz (-6 dB) |
| Coverage | V. 90° H. 90° |
| Sensitivity | 85 dB (1 W, 1 m) |
| Power Handling | 50 W peak |
| Max SPL ¹ | 108 dB (peak) |
| Nominal Impedance | 16 Ω |
| Connector | Euroblock 1,5/ 4-ST-3,81 |
| Handling & Finishes | |
| Dimensions (WxHxD) | 60x600x72 mm (2.36x23.62x2.83 in) |
| Weight | 0.8 kg (1.76 lb) |
| Material | ABS |

| | |
|-------|-------|
| BLACK | GF22 |
| WHITE | GF22W |



¹ Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 1 m.

Mechanical Drawings

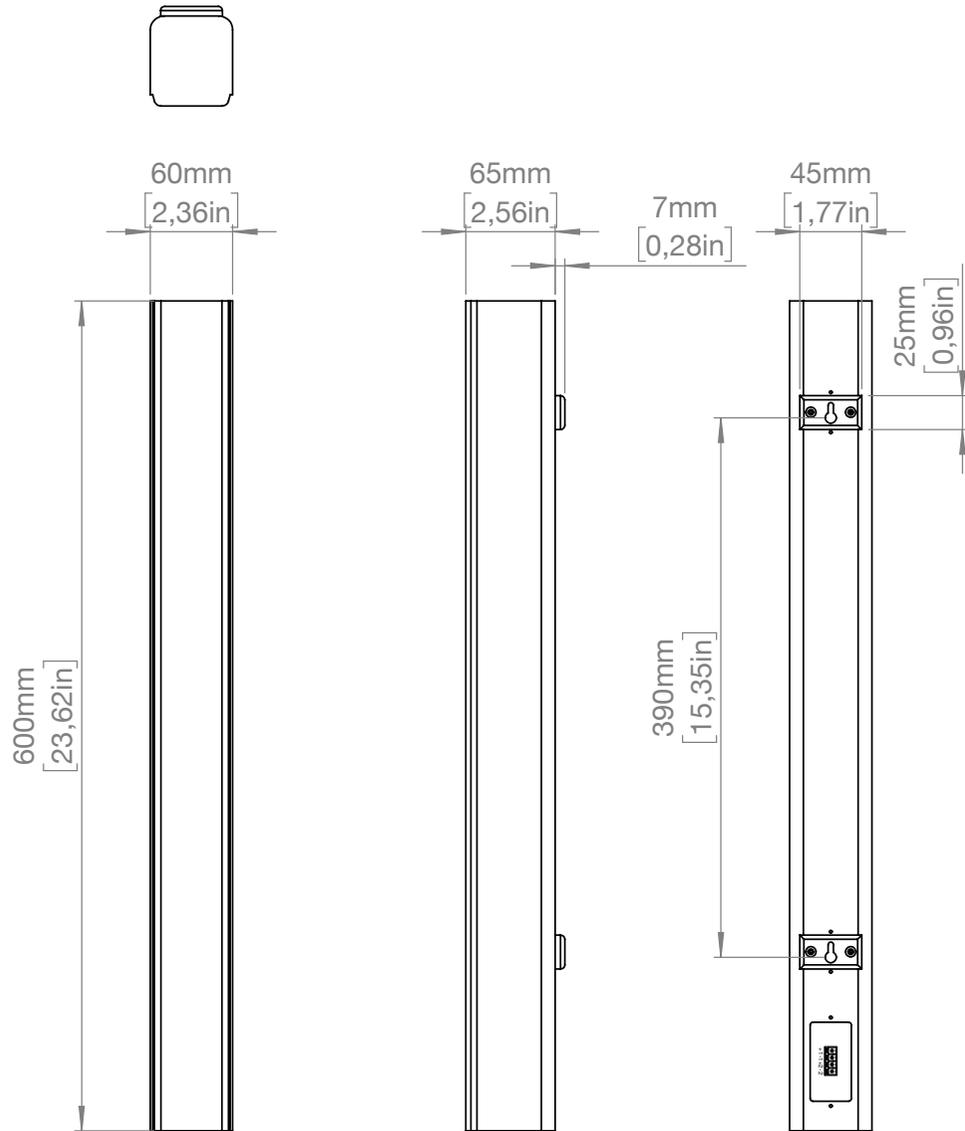

Impedance selection

MC 1,5/ 4-ST-3,81



16Ω Low-Z



Example

